

# PERFORMANCE DATA – InfraCOOL<sup>®</sup> MOSS VALE SAND vs Std Moss Vale Sand

## KEY FACTS : HEAT REFLECTIVE COATINGS

- Due to their large surface area and exposure, Roof Surfaces can capture large amounts of the Sun's energy and thus COOL ROOFS offer potential energy savings.
- Dulux<sup>®</sup> InfraCOOL<sup>®</sup> Technology works by maximising the TOTAL SOLAR REFLECTION including the (invisible) infra-red portion of the Sun's energy which accounts for approx. 50% of the suns total light energy.
- Various internationally accepted verification methods demonstrate the potential benefits of InfraCool<sup>®</sup> Technology in comparative testing vs comparable std colour and/or surface materials.

## ASTM E1980-01 : SOLAR REFLECTANCE INDEX

The following comparative test data (based on constant solar conditions as defined) demonstrates the estimated surface temperature cooling benefit using Dulux<sup>®</sup> InfraCOOL<sup>®</sup> technology against the nominated system.

Total Solar Reflectance (TSR) and Thermal Emittance are measured and then used to estimate resultant Surface Temperature		Std Moss Vale Sand	Dulux <sup>®</sup> AcraTex <sup>®</sup> COOL ROOF Moss Vale Sand
<b>Total Solar Reflectance</b>	ASTM C1549 (% TSR)	57.3 %	62 %
<i>Reflectance of light across the broad solar spectrum inc. visible (colour) and invisible InfraRed radiation</i>			
<b>Thermal Emittance</b>	ASTM C1371 (0-1 scale)	0.85	0.90
<i>The ability of a material to release (ie. emit) captured heat energy. Higher number = Faster Heat release</i>			


ASTM E1980 defines a mathematical equation for Calculating Solar Reflective Index and Estimating resultant Surface Temperature		Test Method defines reporting to 3 wind speeds : Low, Medium & High Medium wind conditions are most typically observed in Australia					
		Low	Medium	High	Low	Medium	High
<b>Calculated Solar Reflectance Index</b>	<i>relevant to wind conditions</i>	65.77	66.78	67.67	74.35	74.63	74.87
<b>Estimated Surface Temperature</b>	<i>Maximum relevant to wind conditions</i>	68	57	47	63	54	46
<b>InfraCOOL<sup>™</sup> effect</b>	<i>Maximum Potential surface temp. COOLING relevant to wind conditions</i>	Low Wind potential		Medium Wind potential		High Wind potential	
<i>Calculations based on constant conditions and 3 wind categories in accordance with ASTM E1980 Air temp (37°C), Solar flux (1000 W/m2), Wind Speeds Low, Medium, High corresponding to (5, 12, 30 W·m<sup>-2</sup>·K<sup>-1</sup>) respectively.</i>		5 °C		3 °C		1 °C	

## ASTM E903: SOLAR ABSORPTANCE :

Total Solar Reflectance (TSR) and Spectral Reflectance of 2 visually equal panels is measured at individual wavelengths from 200-2500 nanometers

Results:

- ❖ Matching reflectance (intersecting lines) in the visible light region confirm the colours are close visual matches.
- ❖ Significantly higher reflectance of InfraCool<sup>®</sup> across the infrared region (separation of the lines above 700 nm).
- ❖ TSR (Total Solar Reflectance) increased from 57.3% to 62% (8% increase) with InfraCool<sup>®</sup> Technology.

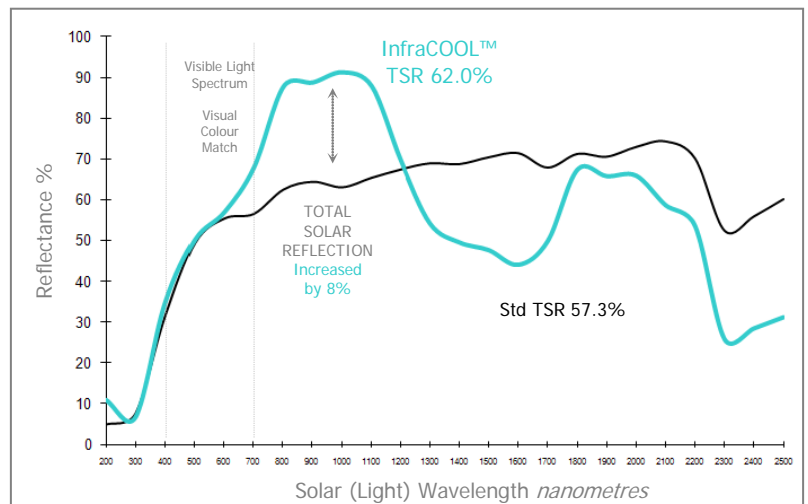

## COLOUR CLASSIFICATIONS :

Solar Absorptance (SA)	
Std (SA)	InfraCOOL <sup>®</sup> (SA)
0.427	0.38

Building Code of Australia (BCA) Classification		
Criteria (SA)	STD rating	InfraCOOL <sup>®</sup> rating
Very Light : <0.4 Light : 0.4-0.60 Dark : >0.6	LIGHT	VERY LIGHT

NSW Building & Sustainability Index (BASIX) Classification		
Criteria (SA)	STD rating	InfraCOOL <sup>®</sup> rating
Light: <0.475 Medium: 0.475-0.70 Dark : >0.70	LIGHT	LIGHT

InfraCOOL<sup>®</sup>...Colours that shield from the sun