

PERFORMANCE DATA – InfraCOOL® TERRACOTTA vs Std Terracotta

KEY FACTS : HEAT REFLECTIVE COATINGS

- Due to their large surface area and exposure, Roof Surfaces can capture large amounts of the Sun's energy and thus COOL ROOFS offer potential energy savings.
- Dulux® InfraCOOL® Technology works by maximising the TOTAL SOLAR REFLECTION including the (invisible) infra-red portion of the Sun's energy which accounts for approx. 50% of the suns total light energy.
- Various internationally accepted verification methods demonstrate the potential benefits of InfraCool® Technology in comparative testing vs comparable std colour and/or surface materials.

ASTM E1980-01 : SOLAR REFLECTANCE INDEX

The following comparative test data (based on constant solar conditions as defined) demonstrates the estimated surface temperature cooling benefit using Dulux® InfraCOOL® technology against the nominated system.


Total Solar Reflectance (TSR) and Thermal Emittance are measured and then used to estimate resultant Surface Temperature		Std Terracotta	Dulux® AcraTex® COOL ROOF Terracotta				
Total Solar Reflectance	ASTM C1549 (% TSR)	41.5 %	49.5 %				
<i>Reflectance of light across the broad solar spectrum inc. visible (colour) and invisible InfraRed radiation</i>							
Thermal Emittance	ASTM C1371 (0-1 scale)	0.85	0.90				
<i>The ability of a material to release (ie. emit) captured heat energy. Higher number = Faster Heat release</i>							
ASTM E1980 defines a mathematical equation for Calculating Solar Reflective Index and Estimating resultant Surface Temperature		<i>Test Method defines reporting to 3 wind speeds : Low, Medium & High Medium wind conditions are most typically observed in Australia</i>					
		<i>Low</i>	<i>Medium</i>	<i>High</i>	<i>Low</i>	<i>Medium</i>	<i>High</i>
Calculated Solar Reflectance Index	<i>relevant to wind conditions</i>	43.87	45.23	46.44	57.43	57.79	58.12
Estimated Surface Temperature	<i>Maximum relevant to wind conditions</i>	80	65	52	72	61	49
InfraCOOL™ effect	<i>Maximum Potential surface temp. COOLING relevant to wind conditions</i>	<i>Low Wind potential</i>		<i>Medium Wind potential</i>		<i>High Wind potential</i>	
<i>Calculations based on constant conditions and 3 wind categories in accordance with ASTM E1980 Air temp (37°C), Solar flux (1000 W/m2), Wind Speeds Low, Medium, High corresponding to (5, 12, 30 W·m⁻²·K⁻¹) respectively.</i>		6 °C		4 °C		2 °C	

ASTM E903: SOLAR ABSORPTANCE :

Total Solar Reflectance (TSR) and Spectral Reflectance of 2 visually equal panels is measured at individual wavelengths from 200-2500 nanometers

Results:

- ❖ Matching reflectance (intersecting lines) in the visible light region confirm the colours are close visual matches.
- ❖ Significantly higher reflectance of InfraCool® across the infrared region (separation of the lines above 700 nm).
- ❖ TSR (Total Solar Reflectance) increased from 41.5% to 49.5% (19% increase) with InfraCool® Technology.

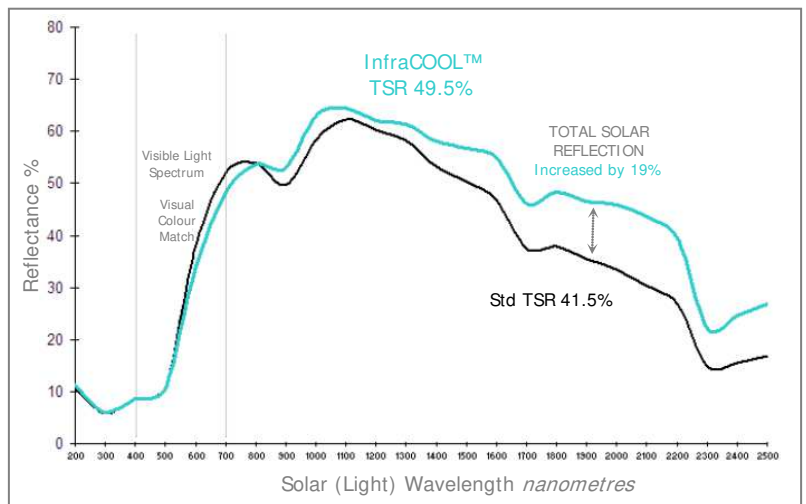

COLOUR CLASSIFICATIONS :

Solar Absorptance (SA)	
Std (SA)	InfraCOOL® (SA)
0.585	0.505

Building Code of Australia (BCA) Classification		
Criteria (SA)	STD rating	InfraCOOL® rating
Very Light : < 0.4	LIGHT	LIGHT
Light : 0.4-0.60		
Dark : > 0.6		

NSW Building & Sustainability Index (BASIX) Classification		
Criteria (SA)	STD rating	InfraCOOL® rating
Light: < 0.475	MEDIUM	MEDIUM
Medium: 0.475-0.70		
Dark : > 0.70		

InfraCOOL®...Colours that shield from the sun