

PERFORMANCE DATA – InfraCOOL[®] DARK GREY vs Std Dark Grey

KEY FACTS : HEAT REFLECTIVE COATINGS

- Due to their large surface area and exposure, Roof Surfaces can capture large amounts of the Sun's energy and thus COOL ROOFS offer potential energy savings.
- Dulux[®] InfraCOOL[®] Technology works by maximising the TOTAL SOLAR REFLECTION including the (invisible) infra-red portion of the Sun's energy which accounts for approx. 50% of the suns total light energy.
- Various internationally accepted verification methods demonstrate the potential benefits of InfraCool[®] Technology in comparative testing vs comparable std colour and/or surface materials.

ASTM E1980-01 : SOLAR REFLECTANCE INDEX

The following comparative test data (based on constant solar conditions as defined) demonstrates the estimated surface temperature cooling benefit using Dulux[®] InfraCOOL[®] technology against the nominated system.

Total Solar Reflectance (TSR) and Thermal Emittance are measured and then used to estimate resultant Surface Temperature		Std Dark Grey	Dulux [®] AcraTex [®] COOL ROOF Dark Grey
Total Solar Reflectance	ASTM C1549 (% TSR)	8.5 %	23.6%
<i>Reflectance of light across the broad solar spectrum inc. visible (colour) and invisible InfraRed radiation</i>			
Thermal Emittance	ASTM C1371 (0-1 scale)	0.85	0.90
<i>The ability of a material to release (ie. emit) captured heat energy. Higher number = Faster Heat release</i>			


ASTM E1980 defines a mathematical equation for Calculating Solar Reflective Index and Estimating resultant Surface Temperature		Test Method defines reporting to 3 wind speeds : Low, Medium & High Medium wind conditions are most typically observed in Australia					
		Low	Medium	High	Low	Medium	High
Calculated Solar Reflectance Index	<i>relevant to wind conditions</i>	-0.16	1.90	3.73	23.34	23.88	24.37
Estimated Surface Temperature	<i>Maximum relevant to wind conditions</i>	103	82	61	91	73	56
InfraCOOL[™] effect	<i>Maximum Potential surface temp. COOLING relevant to wind conditions</i>	Low Wind potential		Medium Wind potential		High Wind potential	
<i>Calculations based on constant conditions and 3 wind categories in accordance with ASTM E1980 Air temp (37°C), Solar flux (1000 W/m2), Wind Speeds Low, Medium, High corresponding to (5, 12, 30 W·m⁻²·K⁻¹) respectively.</i>		12 °C		9 °C		5 °C	

ASTM E903: SOLAR ABSORPTANCE :

Total Solar Reflectance (TSR) and Spectral Reflectance of 2 visually equal panels is measured at individual wavelengths from 200-2500 nanometers

Results:

- ❖ Matching reflectance (intersecting lines) in the visible light region confirm the colours are close visual matches.
- ❖ Significantly higher reflectance of InfraCool[®] across the infrared region (separation of the lines above 700 nm).
- ❖ TSR (Total Solar Reflectance) increased from 8.5% to 23.6% (178% increase) with InfraCool[®] Technology.

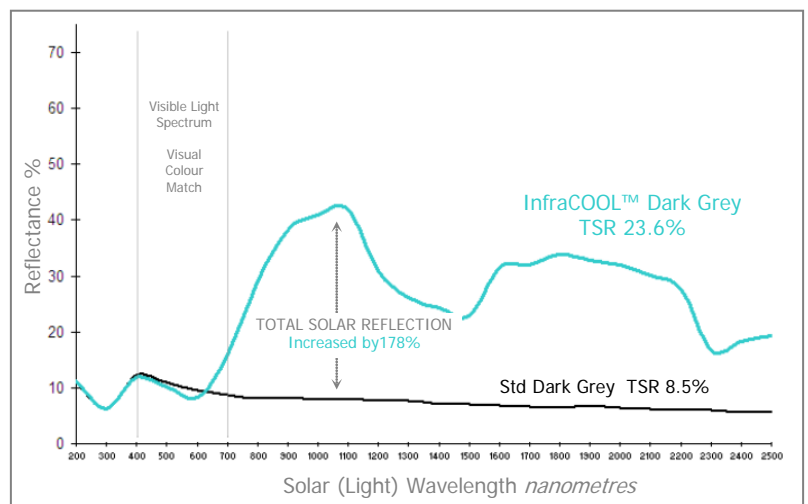

COLOUR CLASSIFICATIONS :

Solar Absorptance (SA)	
Std (SA)	InfraCOOL [®] (SA)
0.915	0.764

Building Code of Australia (BCA) Classification		
Criteria (SA)	STD rating	InfraCOOL [®] rating
Very Light : <0.4 Light : 0.4-0.60 Dark : >0.6	DARK	DARK

NSW Building & Sustainability Index (BASIX) Classification		
Criteria (SA)	STD rating	InfraCOOL [®] rating
Light: <0.475 Medium: 0.475-0.70 Dark : >0.70	DARK	DARK

InfraCOOL[®]... Colours that shield from the sun